


MATERIAL SPECIFICATION & INSTALLATION GUIDE

PRODUCT ITEM CODE & DESCRIPTION

ML 801 ~ RECESSED DOUBLE TOILET ROLL DISPENSER

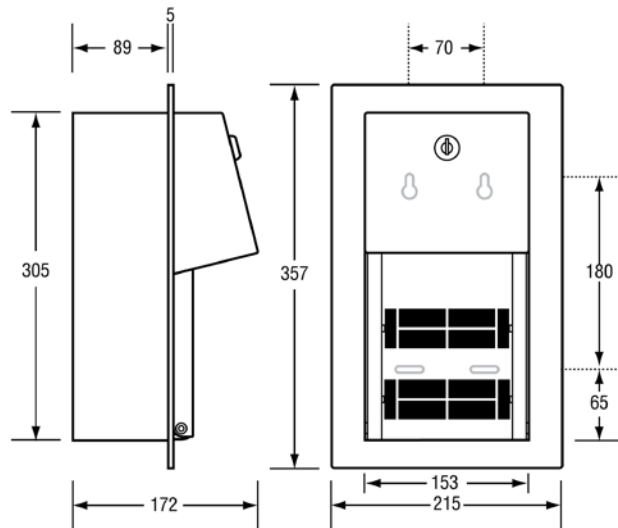

MATERIAL SPECIFICATIONS:

#304 Grade Stainless Steel Cabinet and Flange Surround - #3 Finish / 2 x ABS Roll Holders with SS guide Pins / Recessed Mount, Semi-concealed Fix / keyed Tumbler Lock / Supplied With Fixing Screws

DIMENSIONS:

Overall - 215mmW x 357mmH x 172mmD

Wall Opening - 159mmW x 311mmH x 92mmD

INSTALLATION GUIDE:

1. May be subject to Australian Building Code Regulations for height/location fixing and/or subject to placement as per architectural drawings, which in all cases is the responsibility of the installer re compliance.
2. Locate height on wall and mark cut out dimensions ensuring no services are located within wall cavity. Measure/Check Twice ... Cut Once. Cut out section and fit internal battens if necessary for secure fixing.
3. Fit Flange Surround and place a bead of silicone around the interface surface, then insert into cavity, open unit with key provided then using internal fixing holes (2 keyway type in upper section), loosely secure into battens/wall substrate using supplied fixings or suitable alternative fasteners, ensuring unit is level and even.
4. Check level and tighten fixings/fasteners

NOTE: Paper Not Included. Standard Toilet Rolls are placed on the rollers with the loose leaf facing towards the rear, and the initial roll will drop past the internal spring clip when loaded; upper roll drops automatically when bottom roll is expended.

These units should only be installed by a competent tradesperson and Metlam Australia takes no responsibility for any damage to walls or fixtures due to incorrect installation.