

ML_3000 Hand Dryer

Note

This product is to be installed by suitably qualified persons, in a fit-for-purpose application, to suitable materials, using suitable fixings, and complying with any relevant codes.

Dimensions


279.68mmH x 208.27mmW X 124.95mmD

Hardware Provided

- 1x Mounting Template
- 1x Security Star L-Wrench
- 1x Spare Star Screw
- 4x 8x50 Nylon Expansion Plugs
- 4x Screws
- 1x 70cm Power Cord

Before Installation

- Inspect the product. If there is any damage or missing parts, do not install the product and contact your place of purchase.
- Ensure the surface you wish to mount the dryer to is flat.
- If the dryer is to be hardwired by a qualified electrician, ensure that an isolation switch is installed.
- Make sure that the power supply breaker is switched off.

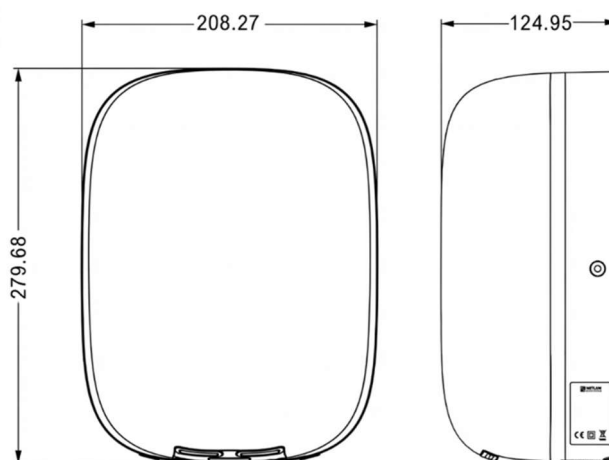

This product is accessible compliant when installed in accordance with AS 1428.1. guidelines.

Installation Instructions


Placement may be subject to regulations/codes and architectural drawings. Correct positioning is the responsibility of the installer.

1. Place the mounting template against the wall at the desired height (the suggested height is 1100mm between the bottom edge of the dryer and the finished floor) and mark the locations of the four mounting holes.
If hardwiring, also mark the position of the power cable entry.
This dryer utilises a motion sensor. To ensure reliable operation, place it away from direct sunlight, high-intensity artificial light, and/or highly reflective surfaces.
2. Undo the two star screws on each side of the dryer. Set the screws aside. Lift the casing off the back plate.
3. Install four suitable fasteners into the wall at the marked locations and attach the back plate.
If using the supplied screws/plugs, drill the holes using an 8mm drill bit.
Please be aware that adhesives are not considered to be a reliable fixing means.
4. Connect the supply wires to the terminal block.
5. Replace the casing and, being careful not to overtighten, replace and tighten the screws.
6. Switch the power supply breaker on.
7. Test dryer for correct operation.
8. Retain the L-wrench and spare screw for the end user.

Note Regarding Accessible Compliance:

"Where provided, ... hand dryers ... shall be operable by one hand, and shall be installed with the height of their operative component or outlet not less than 900 mm and not more than 1100 mm above the plane of the finished floor, and no closer than 500 mm from an internal corner."

- AS 1428.1:2021 clause 12.4.3

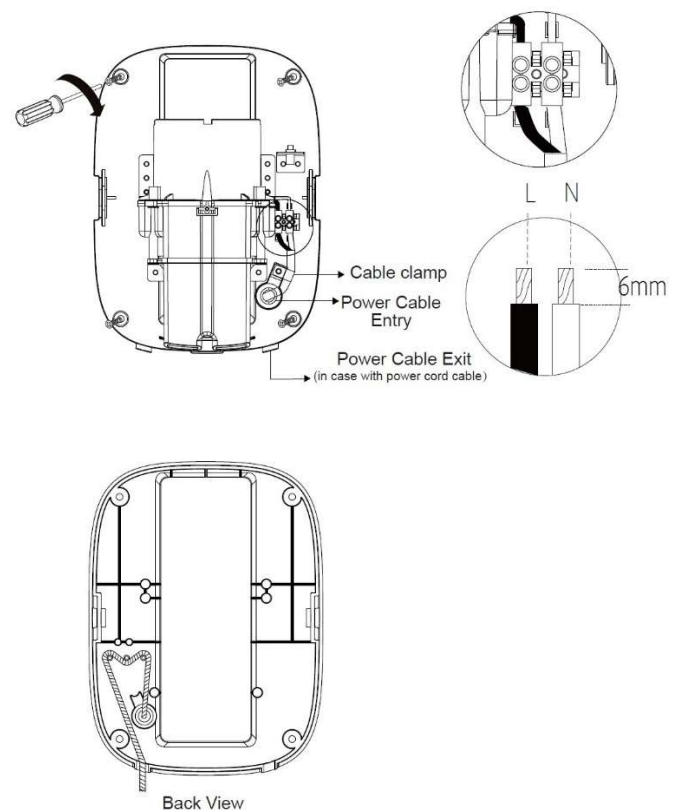


Air Speed Adjustment

The standard setting is that quiet mode (Q-Mode) is off.

The air speed range is between 60m/s and 96m/s

1. Disconnect power, undo the two star screws on each side of the dryer, and remove the casing.
2. Adjust the air speed switch.

ON Slide the switch to “ON” to enable quiet mode.

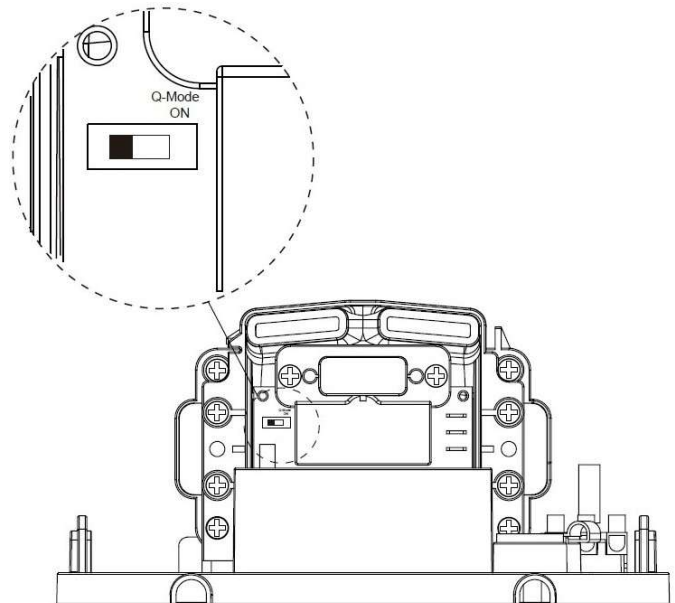

Technical recommendations and installation advice from Metlam Australia Pty Ltd are general in nature and provided in good faith without warranty. Metlam disclaims all liability for errors, omissions, or damage resulting from improper installation or maintenance. All products must be installed by qualified tradespeople and maintained by competent personnel. It is the installer's responsibility to conduct thorough pre-installation assessments; Metlam Australia will not enter into post-installation disputes regarding positioning, functionality, or external factors affecting performance.

The photographs and line drawings of the products presented above are representational only.
Metlam Australia Pty Ltd reserves the right to, and from time to time, make changes and improvements in design and dimensions.